

Datamate **L-Tek**

Datamate **J-Tek**

Datamate  Lok

Latches and Jackscrews – which is which?

To help with your Datamate Connector identification and selection, here is a guide to the types of fixings available in the range, covering Latches, Jackscrews and the 101Lok fixing options...

HARWIN

Datamate L-Tek – the original

L-Tek is short for **Latching** Technology – mating connectors are given added separation force using a choice of latches.



Advantages:

- Fast mating.
- Established product, stocked in depth.
- Less board real estate used than the other Datamate options.
- Single row connectors available.



Disadvantages:

- Locking latches require a specific tool to un-mate the connectors.
- No board hold-down options.
- Only available in a selection of pin counts:
 - 2 to 7, 17 & 22 (Single row)
 - 4 to 20, 26, 34, 44 (Double row)

Datamate L-Tek – the range



Locking Latch (also just referred to as Latch):

- Positively locks connectors together.
- Requires a tool to un-mate the connectors ([Z80-299](#)).



Friction Latch (note: no “window”):

- No tool required to separate connectors
- Adds 2-2.5N to the separation force.
- **Obsolete from 7th September 2018**



No Latch assembled:

- Most commonly used on board-to-board assemblies.



Female:

- Note the bump used to mate with the latch.

Datamate L-Tek – other notes

- All styles of connector are available in a choice of RoHS compliant finishes:
 - Gold on contact area, 100% Tin on Tails/Outer Shell (over nickel)
 - Gold over the complete contact
- PCB mounting connectors (Through Tail and SMT) are currently still available with Tin/Lead plated tails as a Non-RoHS option.
- Use the online [Browser](#) to help select the parts required.

Datamate J-Tek – the flexible range

J-Tek is short for **Jackscrew** Technology – this range has a wide choice of jackscrew styles, based on an M2 thread.



Advantages:

- Wide range of secure fixing and locating styles possible.
- Board mount, panel mount and guide pin options.
- Full range of 04 to 50 contacts available in the majority of designs.



Disadvantages:

- Jacking connectors together can be time-consuming, and requires a screwdriver or hex/allen key.
- Double row connectors only.

Datamate J-Tek – highlights (Male)



Vertical Jackscrew:

- Available with or without board mount fixing underneath.
- Slotted screwdriver available for use with the board mount nuts ([Z80-298](#)).



Horizontal Jackscrew:

- Also available with or without board mount fixing underneath.



Reverse Fix:

- For use with male cable connectors, when the female is on the PCB.
- M2 Male thread not shown at this angle, sits inside the moulding.



No Jackscrew:

- Option available for customers that do not require any fixing, but have to use J-Tek to get the right number of contacts.

Datamate J-Tek – highlights (Female)



Jackscrew:

- Available in either hexagonal socket for hex/allen key (as shown), or with a screwdriver slot and hexagonal outer shape.



Female Guide Pin:

- Mates with any threaded male jackscrew.
- Used in board-to-board for blind mating, and has board mount fixing.



Reverse Fix:

- When using board mounted female with cable male connectors.
- With board mount fixing.



No Jackscrew:

- More commonly used on board-to-board layouts, where the boards are fixed by other methods.

Datamate J-Tek – other notes

- Other jackscrew styles are available – have a look at the online [Browser](#) for all the current options.
- If you need something faster than screwing together jackscrews – read on!
- As with L-Tek, all styles of connector are available in a choice of RoHS compliant finishes:
 - Gold on contact area, 100% Tin on Tails/Outer Shell (over nickel)
 - Gold over the complete contact
- And also, PCB mounting connectors (Through Tail and SMT) are currently still available with Tin/Lead plated tails as a Non-RoHS option.

Datamate 101Lok – fast, secure mating

101Lok is a variant on the J-Tek, unique to Harwin. It utilises a bayonet-style design to combine the advantages of both fixing systems.



Advantages:

- Fast mating and unmating – no screwing required!
- Board mount options available.
- Full range of 04 to 50 contacts available in the majority of designs.



Disadvantages:

- Double row connectors only.

Datamate 101Lok – in pictures



Male 101Lok:

- Available in Vertical or Horizontal orientations, both with or without board mount fixing.



Female 101Lok:

- Slotted and hex/allen key versions available.

Datamate 101Lok – other notes


- See more information on the products available in the 101Lok range on our [product feature](#) page.
- Samples are available [on request](#) if you want to try any of these connectors.
- Finish options are the same as the rest of Datamate: all styles of connector are available in a choice of RoHS compliant finishes...
 - Gold on contact area, 100% Tin on Tails/Outer Shell (over nickel)
 - Gold over the complete contact
- ... and PCB mounting connectors (Through Tail and SMT) are currently still available with Tin/Lead plated tails as a Non-RoHS option.

Get Help from a Harwin Expert

Our experts are specialists in their field with many years of experience in their respective roles and industries.

Find an expert that can help you with your enquiry.

Click Here >>

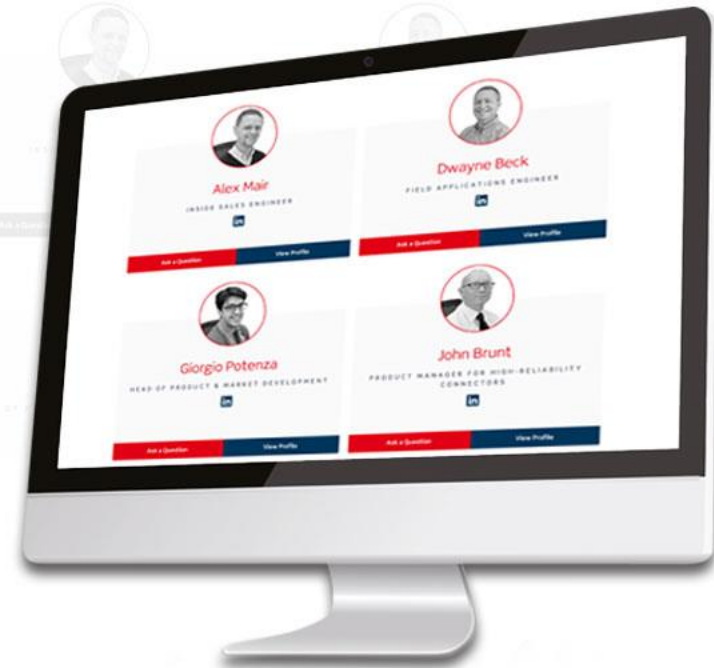

CAD Models and Evaluation Samples also available at www.harwin.com

HARWIN