


HELIUM

WORLD'S SMALLEST 0201 SMD LED





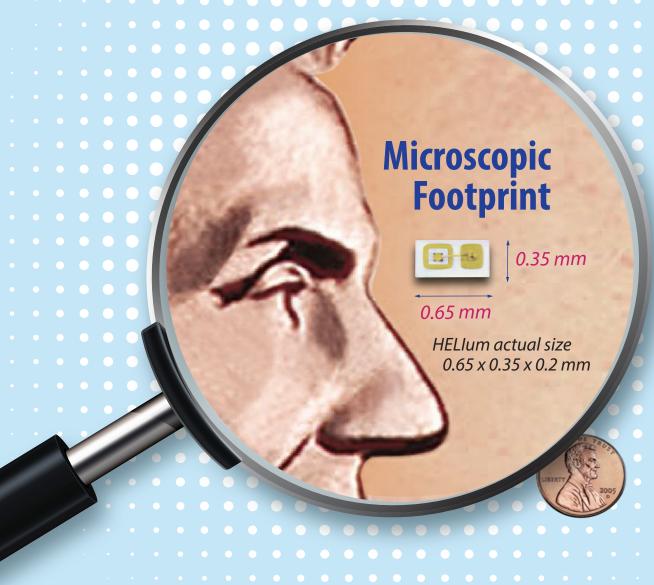








WORLD'S SMALLEST 0201 SMD LED

Product Features

- Industry's smallest SMD LED 0201 footprint
- 0.65 x 0.35 x 0.20mm (LxWxH), various colors available
- · Compatible with automatic placement equipments
- Moisture sensitivity level: Level 2, RoHS compliant

Applications

- Superb for mobile and wearable applications
- Ideal for disposable medical devices
- Ideal for portable devices with limited space

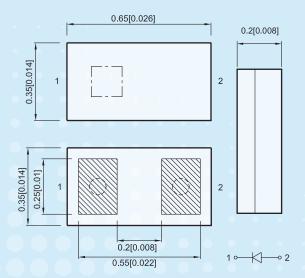

PRODUCT SPECIFICATION

Product Photos	Part Number	l _F	λD (nm)	lv (mcd)		Viewing
				Min.	Тур.	Angle
0.20 mm 0.35 mm 0.65 mm	APG0603RWF-TT-5MAV	5	☐ X=0.31 Y=0.31	30	100	135°
	APG0603PBC-TT-5MAV	5	467	15	25	145°
	APG0603VGC-TT-5MAV	5	527	30	80	145°
	APG0603CGC-TT	10	571	6	15	135°
	APG0603SYC-TT	10	589	10	30	135°
	APG0603SEC-TT	10	605	20	50	135°
	APG0603SEC-E-TT	10	624	15	40	135°
	APG0603SURC-TT	10	631	10	35	135°

OTHER COMPACT OPTIONS

APHB1608 Series APFA2507 Series APGF1011 Series · Smallest tricolor RGB with · Standard 0603 footprints Smallest right angle side-firing tricolor RGB LED 0404 footprint with 2 colors, 4 pinouts 1.0 mm 0.2 mm · Generates wide range · Available in various · 2.5x0.7x1.0 (LxHxW) color combinations of mixed colors · Wide viewing angle • 1.0x1.0x0.2mm Suitable for status · Lower Vf required (LxWxH) indication & 2.5 mm · Generates wide range backlight · Lower Vf required of mixed colors











